


STANDARD LINE SERIES

Over time, the **Fenner Standard Line Series** has proven to meet all belt cleaning needs. The rugged construction and standard stainless steel hardware equals longer lasting cleaning in the most abusive conditions.

Standard V-Plow

The **Standard V-Plow** is designed for applications carrying light to moderate material at moderate belt speeds. These applications would include but are not exclusive to: quarries, power generation, cement, grain, and coal prep plants.

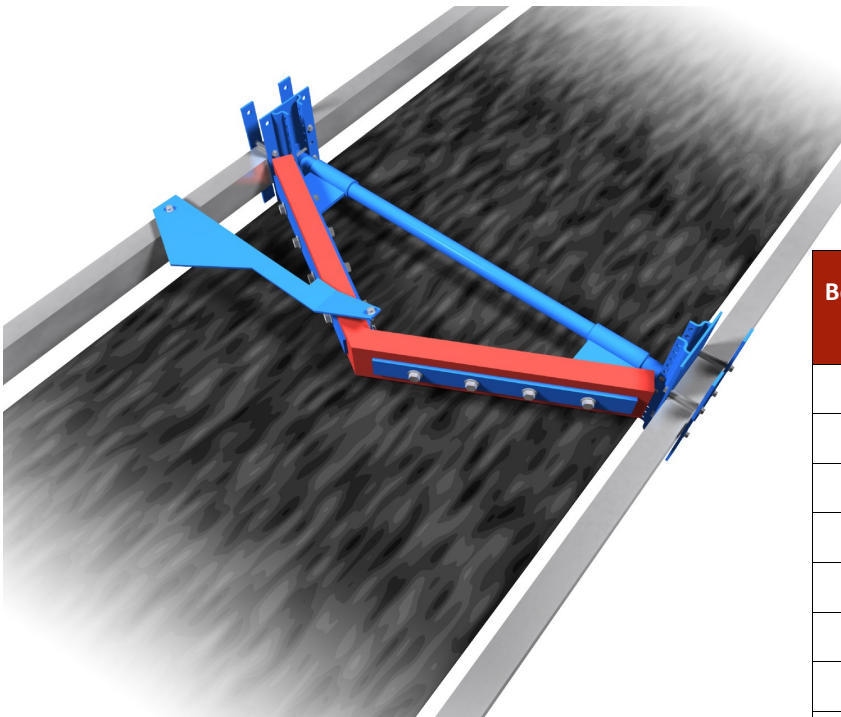

Belt Width Inches	Blade Coverage Inches	Replacement Blade Part Number	Standard V-Plow Assembly Part Number
30	39	CEVPBL-30	CSEVP-30
36	48	CEVPBL-36	CSEVP-36
42	55	CEVPBL-42	CSEVP-42
48	62	CEVPBL-48	CSEVP-48
54	69	CEVPBL-54	CSEVP-54
60	77	CEVPBL-60	CSEVP-60
72	96	CEVPBL-72	CSEVP-72
84	103	CEVPBL-84	CEVPBL-84

Features of the **Standard V-Plow**:

- Proven for the removal of refuse material from the return side of the conveyor belt
- Top quality 1" thick X 8" high urethane blade that can be flipped for 3" of wear on both sides
- Double-sided urethane blade extends blade life and further protects the belt and tail pulley
- Heavy 1/4" Safety Chain prevents belt damage
- Designed to float up and down
- Stainless steel hardware throughout
- Installs easily to most bed rail structure

A - STRUCTURE WIDTH (outside)
B - STRUCTURE WIDTH (inside)
C - BELT WIDTH

